

IDEAL THERMSTORE INDIRECT



Gas or oil boiler



High efficiency corrugated coil maximises heat transfer to the cylinder of water



Corrugated coil provides faster reheat times compared to plain coil




90 degree elbow supplied as standard



3kW immersion heater for emergency back-up

TECHNICAL SPECIFICATION

Ideal Thermstore Indirect

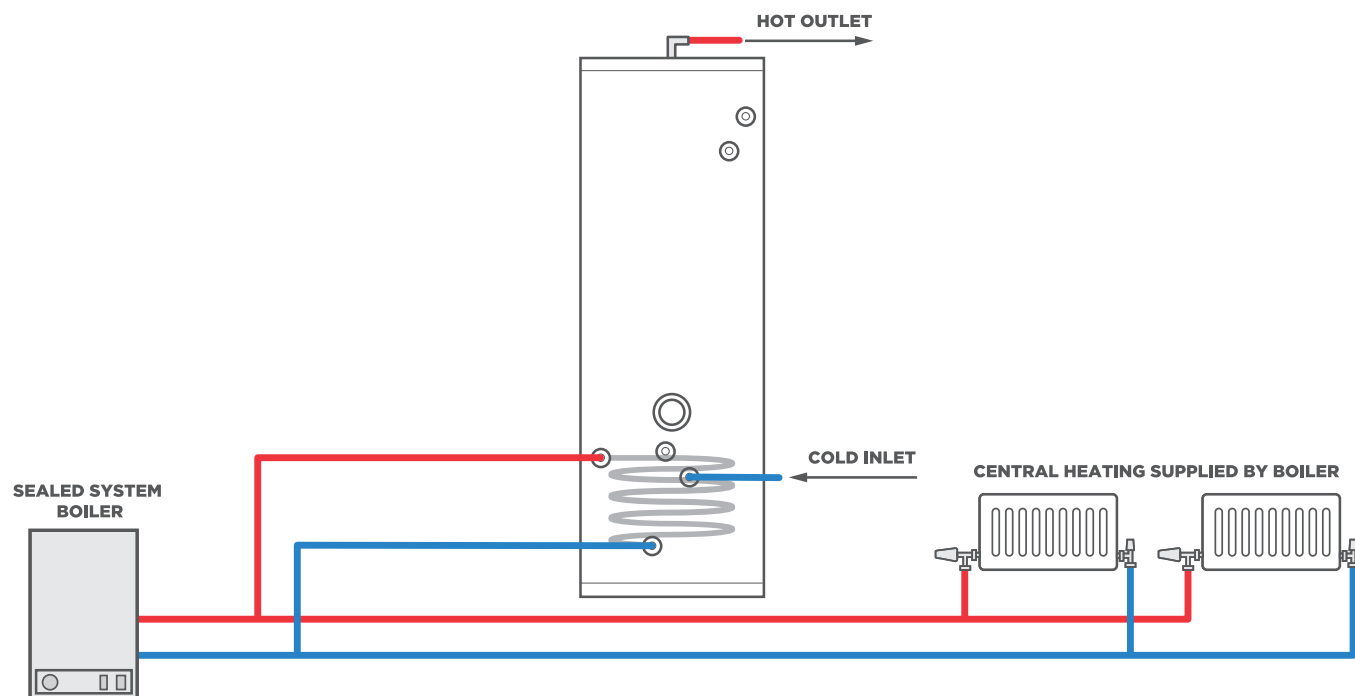

Description		IND90	IND120	IND150	IND180	IND210	IND250	IND300	IND400
Product stock code		IDEPLUIN090	IDEPLUIN120	IDEPLUIN150	IDEPLUIN180	IDEPLUIN210	IDEPLUIN250	IDEPLUIN300	IDEPLUIN400
ErP rating		A	B	B	B	B	C	C	C
Heat loss	watts	32	39	47	55	62	74	86	87
Heat loss (kW/24hr)	watts	0.77	0.94	1.13	1.32	1.49	1.78	2.06	2.09
Capacity	litres	91	119	148	178	208	248	287	393
Height	mm	764	931	1118	1306	1494	1744	1990	2030
Diameter	mm	550	550	550	550	550	550	550	630
Weight (empty)	kg	20	23	26	30	33	38	43	55
Weight (full)	kg	111	142	174	208	241	286	330	455
Heat up time	min	17	21	25	30	32	36	38	41
Number of immersions		1	1	1	1	1	2	2	2
Secondary return		No	No	No	No	Yes	Yes	Yes	Yes

T: 01482 492251 E: ideal@idealheating.com

Ideal Heating, PO Box 103, National Avenue, Kingston upon Hull, East Yorkshire, HU5 4JN.